


FELDER®

F 900 M

THE MOST POWERFUL
FELDER SPINDLE MOULDER
OF ALL TIME

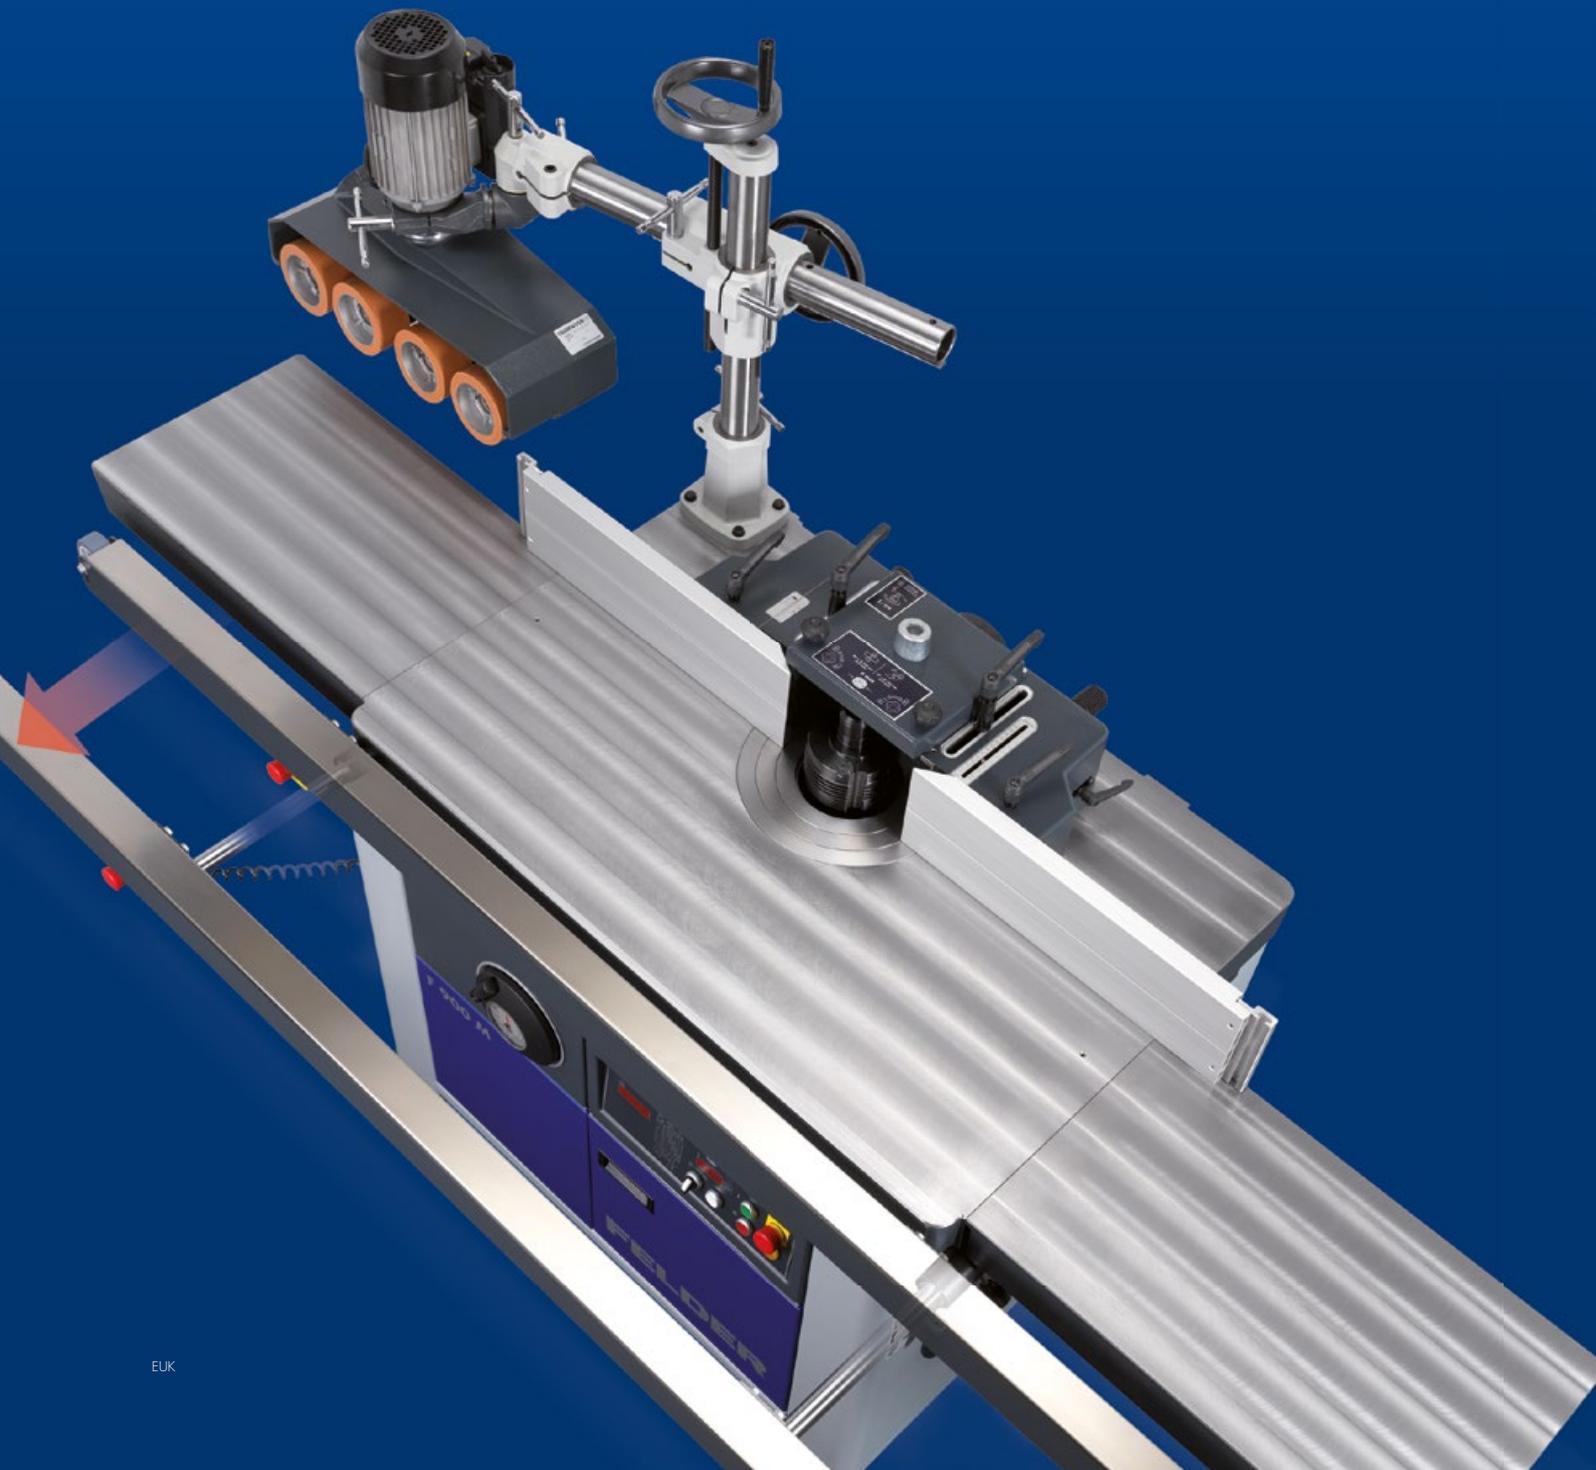

FELDER®



F 900 M

The heaviest built Felder shaper ever



Solid wood



Panel material



F 900 M

- » Solid cast iron table for vibration-free stability
- » Maximum ease of use with "Power-Drive": electrical height and angle adjustment
- » Felder spindle moulder quick-change system: maximum productivity thanks to minimum set-up times
- » Maximum operating safety: spindle tilts from 90°–45° rearwards
- » "Easy-Glide" maintenance free tilt segment with a 6 year guarantee
- » 320 mm table opening– Your advantage in panel raising
- » Reliable repeatability and precise quick adjustment:
The Felder MULTI fine adjustment system
- » Rotating speeds: 3,500, 4,500, 6,000, 8,000, 10,000 rpm
(Option: continuously adjustable 1,500–10,000 rpm)

The new, optimised machine concept makes the F 900 M spindle moulder the perfect solution for all requirements of professional woodworking. Maximum machine construction precision from Austria and high quality premium components ensure absolute precision, maximum operating comfort and guaranteed reliability. Numerous innovations and proven Felder quality ensures that the F 900 M is an absolute highlight in its class.

... Your decision for Felder, a risk-free decision

- » The right machine for every budget
- » Complete reliability in professional use
- » Tailor made machine solutions
- » High quality cast iron machine table and aggregates
- » Innovative detail solutions derived from 65 years of experience - already included in the standard configuration
- » First class manufacturing and finishing standards
- » Intuitive application concepts
- » Modern, distinct design
- » Quality and precision from AUSTRIA
- » Powerful and efficient
- » Complete package: Comprehensive service support

The most important highlights at a glance



Solid cast iron tables

With 1,200 mm, the solid cast iron moulding table offers a large-surface support area with maximum stability which can be extended to a total table length of 2,200 mm using the proven Felder cast iron extensions for oversized workpiece processing.



Moulder spindle tilt 90°–45°

The Felder rearward tilting Spindle is the correct way for easy and safe operation:

- » Working safely
- » Suitable for any workpiece size
- » Problem-free power feeder application
- » Impeccable workpiece finish
- » Optimal chip removal



Spindle moulder quick change

Advantages of the Felder spindle quick change system:

- » Quick, easy change between different types of spindles
- » Ability to use 30, 32, 35, 40, 50 mm and 1 ¼", diameter spindles
- » Use of the Felder high speed router spindle for router bits or high speed tools at 15,000 rpm.
- » Automatic repeatable setting for shaper production work

FELDER®

Details



Spindle fence "230"

The fence is suitable for tools with a diameter up to max. Ø 230. The fine adjustment of the outfeed fence can be set between -5 to +25 mm. The extraction of the dust is done via the integrated extraction connection.

The MULTI-fine adjustment system

Additional to the parallel guiding of the spindle fence the MULTI-adjustment system also enables

- » The quick adjustment to the tool diameter
- » Automatic repeat setting after removal of your fence
- » Parallel adjustments of the shaper fence
- » Quick and accurate adjustment
- » Measurement scale for depth of cut



"Easy Glide" tilting guide system

The patented tilt segment 'Easy-Glide' fulfills the highest requirements in businesses and industries. A precise, forced guided, double suspension guarantees maximum load bearing, zero backlash tilting, and is absolutely maintenance free. A special, highly durable synthetic material situated in the guide of the tilting segment ensures extremely smooth movement and long-lasting precision. The tilting guide system works with a synthetic material such as that used in aerospace and airlock construction, which makes it absolutely maintenance-free without the need for lubricants, while also being resistant to dust. With a 6 year factory guarantee this Felder component offers reliability for many years to come.



Table opening 320 mm

The large spindle table opening offers you maximum working safety: Large dimensioned panel raising tools as well as slot and tenoning tooling can be used below the table surface.



Table extension frame

You can perfectly process large-dimensioned workpieces, e.g. when rebating doors, with these valuable accessories.




Power-Drive

The "Power-Drive" package offers maximum user comfort ensuring that the height and angle adjustment of the shaper spindle can be quickly and precisely electronically controlled. The quick settings can be adjusted at the turn of a knob and the fine adjustment is carried out at the push of a button. Red LED digits display the current position in real time on the control panel.



"Quick-Lock" – change moulding tools quickly and safely

Change moulding tools quickly and safely. The "Quick-Lock" clamping system allows a convenient change of cutters on the table router and reduces the risk of injury from slipping. Suitable for Ø 30 mm spindles.

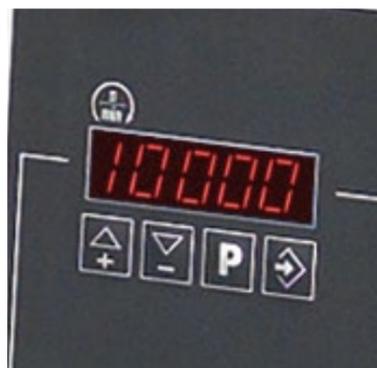


Variable speed control

Optionally – continuously variable speed control up to 10,000 rpm – perfect results whatever the material.



Fence Plate

Hardened anodised aluminium fence plates are standard. The removable fence plate can be accurately fine-adjusted along the scale from -5 to +25 mm.

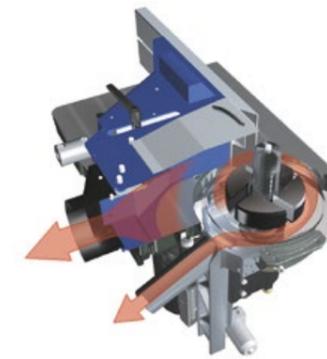

Dual dust extraction for spindle moulder

The dual dust extraction for the shaper via the shaper fence and the chip collection bin under the cutterhead ensures clean and trouble free operation.



Power feeder

The use of a power feeder ensures that standard work when moulding can be carried out cleanly and precisely.



Spindle moulder unit "900"

- Decades of machine construction experience combined with modern production techniques is reflected in every detail of the heavy-duty 900 series spindle aggregate.
- » Spindle useable height of up to 140 mm, 30 mm diameter spindle (160 for 40 and 50 mm diameter spindles)
 - » Shaper quick-change system
 - » Change the speed simply from the front of the machine
 - » Collet chuck spindle for router tools with a speed of 15,000 rpm
 - » Electrical height adjustment with digital LED display
 - » Electrical angle adjustment with digital LED display
 - » Dovetail guidance system of the height adjustment
 - » 2 bearing seats for the shaper spindle
 - » Excellent vibration absorption from heavy cast iron unit
 - » Maximum power transmission achieved through the Poly-V belts and counter surface
 - » Variable speed control 1,500-10,000 rpm
 - » Digital rotation speed display



Swing away device

The "swing away" power feeder arm allows for maximum operating convenience.



Safety Bar Guides

The safety bar guides, great for "end-grain" work (optional).

Technical specifications

Electrics	F 900 M
001 3x 400 V motor voltage	S
002 3x 230 V motor voltage	W
004 50 Hz motor frequency	S
005 60 Hz motor frequency	W
007 5.5 HP (4.0 kW)	S
008 10.0 PS (7.35 kW)	O
009 13.5 HP (10.0 kW)	O
10 Star-delta start is necessary from 7.5 HP and 3x230V	S
12 Switch contact for the control of an extractor	O
13 Operating hour meter	O
14 3-phase CEE coupling for additional equipment with time-delayed connection (essential for the use of a power feeder)	O
17 Continuously variable speed control 1500–10,000 rpm with soft start (replaces star-delta start-up) for 3x 230 V or 3x 400 V; only for 10.0 HP (7.35 kW) (#110)	O
- 5 speeds 3,500/4,500/6,000/8,000/10,000 rpm	S
- Switch for forward and reverse run	S

Spindle moulder unit and spindle fence	
103 30 mm diameter spindle, 140 mm useable spindle height above the table	S
102 50 mm Ø spindle instead of 30 mm spindle, 160 mm useable height above the table	O
101 40 mm Ø spindle instead of 30 mm spindle, 160 mm useable height above the table	O
105 Spindle Ø 1¼", instead of 30 mm, 140 mm useable height above the table	O
106 35 mm Ø router spindle, 140 mm useable height	O
107 32 mm Ø router spindle, 140 mm useable height	O
108 Highspeed router spindle 15,000 rpm instead of a 30 mm Ø moulder spindle	O
109 Manual spindle tilt 90° – 45°	S
110 Electric spindle tilt 90°–45°	O
118 Electrical height adjustment of the moulding spindle	S
112 "230" spindle moulder fence for max. tooling diameter 230 mm, 550 mm fence plates	S
113 MULTI-fine adjustment system for the spindle moulder fence "230" (#112)	S
116 550 mm anodised aluminium fence plates	S
117 Anodised aluminium fence plates and safety bar guides (#112)	O
119 Digital LED display for spindle height and angle (#110)	O
121 Spindle locking from outside	S
123 EURO spindle moulder guard	S
125 "Integral" safety bar guides 500 mm	O
127 Prepared for digital speed display for high-speed spindle (#108)	W
180 1,270 mm extendable frame with emergency stop	O
183 670 mm table extension on both sides with 2,200 mm extendable frame	O
- Table opening in mm	320

Feeder device	F 900 M
226 Professional power feeder package for series production work (#001)	O
General	
- Extraction connection-Ø in mm Spindle fence/below table level spindle aggregate	120/80
- Working height in mm	890
- Weight kg (with standard configuration)	730
- Min. transport width in mm	920
Important accessories	
212 Swingaway device for power feeder	O
215 Application routing device for fixed bed spindle moulders	O
223 IPPC palette	O
Transport	
221 Container transport preparation	O

Product range

Sliding Table Panel Saws

K 945 S K 740 S K 740 professional K 700 S K 700 professional K 700 K 540 S K 500 S K 500 professional K 500

Spindle Moulders

F 900 M F 900 Z F 700 M F 700 Z F 500 MS F 500 M

Saw-Shapers

KF 700 S professional KF 700 professional KF 700 KF 500 professional KF 500

Planers

AD 951 AD 941 AD 741 AD 531 A 951 L A 941 D 951 D 963

Combination machines

CF 741 S professional CF 741 professional CF 741 CF 531 professional CF 531

Bandsaws

FB 940 RS FB 740 RS FB 940 S/SW FB 740 S/SW FB 940/840 FB 740/640 FB 710 FB 610 FB 510

Dowel Boring Machine, Drilling Machine and Horizontal Mortiser

FD 29 professional FD 21 professional FD 250

Heated Veneer Presses

MVP 31.14 flex

Wide Belt Sanding Machines

FW 1102 perform FW 1102 classic FW 950 classic FW 850 classic

Brushing Machine

structura 60.02 structura 40.02

Belt and Edge Sanders

FS 722 FS 900 KF FS 900 K FS 700 K

Edgebanders

G 560 / G 580 classic G 500 EX G 380 G 360 G 330

G 263 G 220 ForKa 300 S eco

Vertical panel saw

KV 925

Extraction Units & Briquetting Presses

RL 350 RL 300 RL 250 RL 200 RL 160 RL 140 RL 125

FBP 50/60/70 AF 22-D200 AF 22 Mobil/Stand/Wandmontage AF 16 AF 14 AF 12

FELDER®

FELDER Quality and precision in a nutshell

Since 1956, a guarantee for perfect results with excellent ease of use and reliability in regular professional use. Woodworkers are always enthusiastic about the individual and solid solutions for small and mid-sized businesses.

FELDER GROUP

KR-Felder-Straße 1
A-6060 HALL in Tirol

🇬🇧 Tel. +44 1908 635000
www.felder.uk
[Contact](#)

🇮🇪 Tel. +353 906625756
www.felder.ie
[Contact](#)

🇮🇳 Tel. 1800 274 3040
www.felder.in
[Contact](#)

🌐 Tel. +43 5223 58500
www.felder.int
[Contact](#)