

FELDER®

D 951

Quality and precision

FELDER®



D 951

FELDER

D 951

Quality and precision



Solid wood



D 951

- » Surface planing width: 20 ⁵/₆₄"
- » Cutterblock: self-aligning planer knives;
Silent-Power® Spiral Knife Cutterblock (optional)
- » Max. depth of cut: 8 mm

This machine will provide you with a higher level of precision and quality than you would ever expect from a planer.

For decades, the Felder system with its disposable, reversible planing knives has proven its value. High-precision production and factory settings eliminate the need for tiresome adjustment work when changing planing knives or the purchase of expensive setting gauges.

Changing the planer knives is a piece of cake. In just a few minutes, the 4-knife cutterblock is ready for use with sharp new Felder planer knives.

... Your decision for Felder, a risk-free decision

- » The right machine for every budget
- » Complete reliability in professional use
- » Tailor made machine solutions
- » High quality cast iron machine table and aggregates
- » Innovative detail solutions derived from 65 years of experience - already included in the standard configuration
- » First class manufacturing and finishing standards
- » Intuitive application concepts
- » Modern, distinct design
- » Quality and precision from AUSTRIA
- » Powerful and efficient
- » Complete package: Comprehensive service support

The most important highlights at a glance



Silent-Power®

Exclusive for jointer/planers from the Felder Group The Silent-Power® spiral blade cutterblock cuts noise levels during planing by well over half and provides a continuous pulling cut for tear-free planing patterns in any type of wood. With this revolutionary new development from you are obtaining all of the advantages of a spiral cutterblock at considerably lower operating, investment and adjustment costs. The benefits of the Silent-Power® spiral blade cutterblock at a glance:

- » Sensationally quiet, noise is reduced by 50%!
- » Blade life up to 20 times longer
- » Four highly precise cutting edges on each knife
- » Optimised chip extraction and reduced chip volume
- » Tear-free planing results



Variable infeed

Regardless of the type of wood and grain, the variable feed speed of between 13 ft–52 ft/ min always guarantees a perfect planing result.



Power-Drive

The fully electrical "Power-Drive" planer table control offers the most precise adjustment and repeat accuracy. With a turn of the knob, you can quickly adjust the thickening height, then fine-adjust using the button. With the integrated LED-display, you can easily see the current actual value.



"Digi-Drive"

Enter the thickness required, press Start and the thickening bed adjusts exactly to the desired position. LED displays for the required and actual values. Additional functions: incremental adjustment, 4 programmable thickening table positions.

Details



Cutterblock housing

The solid cast iron cutterblock housing is built for heavy duty work. On request, rubberized outfeed rollers can be supplied. The pressure beams combined with the rubber or segmented infeed roller serves to machine simultaneously workpieces of differing width.




FELDER System cutterblock

The Felder system cutterblock has guaranteed perfect planing results for decades

- » Knife change in less than two minutes
- » Self-aligning knives are perfectly set each and every time
- » No resin buildup on the clamping screws
- » Extremely smooth operation due to the enclosed design
- » Maximum durability of the knives
- » Cost saving with cheaper knife costs




Spring loaded segmented pressure beam
A recommended option when planing with a small depth of cut, with very thin workpieces or workpieces with different thicknesses.

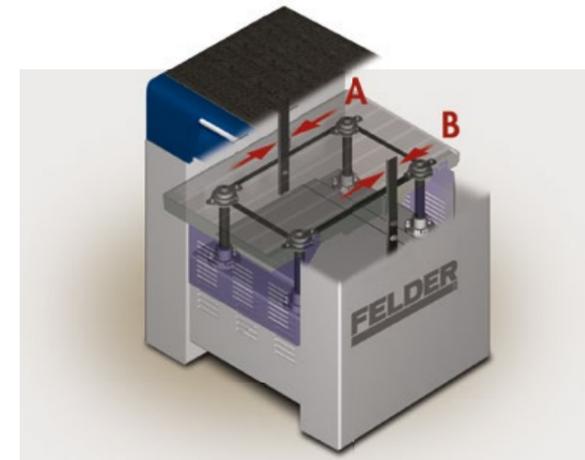

Trapezoidal threaded spindle
4 trapezoidal support spindles ensure utmost precision and high load bearing capacity. The thickening table slides precisely along the vertical guides in longitudinal direction (A + B). These longitudinal guides also absorb the feed pressure occurring during thickness planing in the direction of the outfeed.



Adjustable under table roller
Optional integrated adjustable bed rollers are available for processing workpieces with high resin or moisture content.

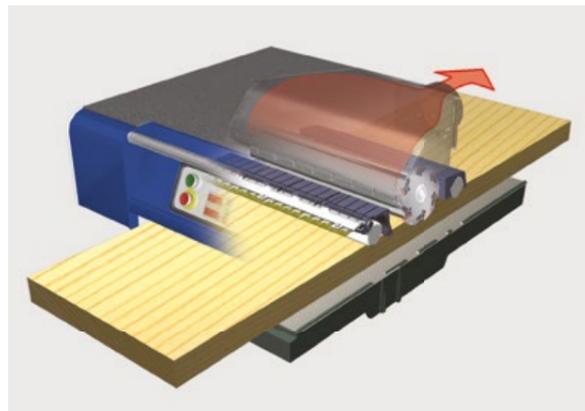

Dust extraction hood.
Heavy chip loads are no problem for the chip extraction hood due to its efficient design and large dimension. Two pressure bars prevent the fluttering of the workpiece, in particular thinner pieces when thickening.



Scissor lifting table
On request, the thickening table can be extended by 1,150 mm with a scissor lifting table.

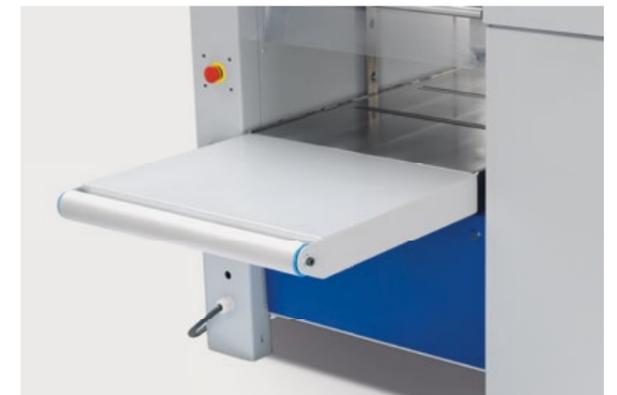


Table extension
When thickness planing several workpieces at the same time, the 22 7/16" long table extension with outfeed workpiece roller assists in the removal of the finished workpieces.



Perfect planing technology
Two pressure bars prevent the fluttering of the workpiece, in particular thinner pieces when thickening.



Workpiece roller on the infeed side
The workpiece roller is mounted on the infeed side. Only suitable for jointers with electrical thickening bed adjustment. Steel, powder coated.

Technical specifications

Electrics		D 951
001	3x 400 V motor voltage	S
002	3x 230 V motor voltage	W
004	50 Hz motor frequency	S
005	60 Hz motor frequency	W
006	5.5 PS (4.0 kW)	S
007	5.5 HP (4.0 kW)	O
008	10.0 PS (7.35 kW)	O
10	Star-delta start is necessary from 7.5 HP and 3x230V	O
12	Switch contact for the control of an extractor	O
13	Operating hour meter	O
Cutterblock		
39	4 knife Felder-system cutter-block	S
40	4 knife Standard cutter-block using traditional single sided planer knives	O
41	4 knife TERSA cutter-block	O
44	Silent-Power spiral cutterblock	O
-	Number of knives – Silent-Power spiral cutterblock	77
-	Cutterblock diameter in mm	120
Thicknesser and feed gears;		
50	Thicknessing width in mm	504
51	Digital display of the thicknessing height in mm;	S
52	Digital display of the thicknessing height in inches	O
53	Electrical height adjustment for thicknesser table ("Power-Drive" D1) (#55/60)	O
55	Electronic digital display for the thicknessing table adjustment (#53)	O
57	Variable speed 4–16 m/min	S
59	2 adjustable rollers under the thicknessing table, adjustment range 0–0.5 mm (#53)	O
60	Positioning control for thicknesser table height, dimensions can be preselected ("Digi-Drive D1") (# 53)	O
61	Rubberised infeed roller (#62)	O
62	Rubber outfeed roller	O
63	Spring loaded segmented pressure bar (recommended with Option 061)	O
-	Steel outfeed roller, micro-serrated	S
-	Min.-max. thicknessing height in mm	4–254
-	Steel infeed roller	S
-	Min. workpiece length in mm	250
-	Max. depth of cut (mm)	8

General		
-	Thicknesser extraction connection-Ø in mm	140
-	Weight kg (with standard configuration)	650
Important accessories		
211	Thicknesser table workpiece roller on the infeed side (#53)	O
223	IPPC palette	O
224	Table extension with workpiece roller for the thicknesser table (20 ⁵ / ₆₄ -22 ⁷ / ₁₆ "), limited to a maximum of 5 mm planing depth!	O
225	The scissor lifting table to be mounted on the thicknesser table	O
Transport		
221	Container transport preparation	O

Product range

Sliding Table Panel Saws



Shapers



Saw-Shapers




Planers



Combination machines



Bandsaws

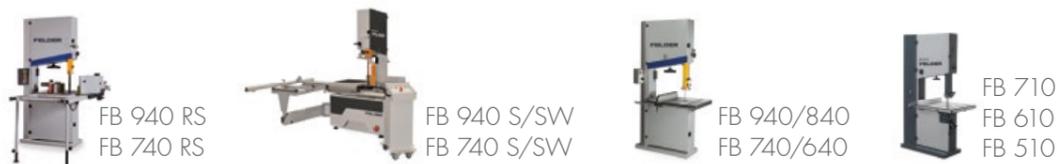

Dowel Boring Machine, Drilling Machine and Horizontal Mortiser



Heated Veneer Presses



Wide Belt Sanding Machines



Brushing Machine



Belt and Edge Sanders



Edgebanders



Vertical panel saw



Extraction Units & Briquetting Presses



FELDER®

FELDER Quality and precision in a nutshell

Since 1956, a guarantee for perfect results with excellent ease of use and reliability in regular professional use. Woodworkers are always enthusiastic about the individual and solid solutions for small and mid-sized businesses.

FELDER GROUP

KR-Felder-Straße 1
A-6060 HALL in Tirol

☎ Tel. +1 866-792-5288

www.felder.us

[Contact](#)